

High Pressure | **Series N500**  
 • Chassis Grease • Hydraulics • Air/Water

**To handle single 1/4" or 3/8" I.D. hose.**

- Compact frame and narrow base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° swivel joint, 1/4" female NPT threads. 3/8" female NPT threads are optional and **must be specified**.
- Standard outlet: 1/4" female NPT threads. 3/8" female NPT threads are optional and **must be specified**.
- Other threads can be furnished and **must be specified**.
- Standard 1/4" pressure and temperature: 10,000 psi (690 bar), -40°F to +250°F (-40°C to +121°C).
- Standard 3/8" pressure and temperature: 3000 psi (207 bar), -40°F to +250°F (-40°C to +121°C).
- Optional 3/8" pressure: 8000 psi (552 bar) – must specify.
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right. TR roller positions: swivel joint is standard on the left. Other configurations available, must specify.
- Constant tension is available – consult factory.



Standard configuration shown with optional full-flow swivel joint



**Optional Swivel Mounting Bracket**

Part No. 8908-8990.  
 For N-Series spring retractable reels, available as a kit. Conditions apply, consult factory.

**PARTS DRAWING – ISO 92**

Model Number	Hose Capacity of Reel feet / m			Approx. Weight lb. / kg			Standard Roller Assy.	Reel Dimensions*** in. / mm							
	I.D. in. / mm	1/4" / 6	3/8" / 10	NET	UPS / FedEx SHIP WT.	Freight SHIP WT.		A	B	C	E	F	G	H	X
	O.D. in. / mm	5/8" / 16	3/4" / 19												
<b>N515-14-16-8L</b>	25 / 8	25 / 8	25 / 8	48 / 22	64* / 29	83 / 38	<b>N203</b>	9 / 229	3 / 76	8 / 203	17.62 / 448	10.12 / 257	16.25 / 413	9.12 / 232	7 / 178
<b>N515-16-17-10.5C</b>	35 / 11	35 / 11	35 / 11	51 / 23	67* / 30	86 / 39	<b>N203</b>	9 / 229	3 / 76	10.5 / 267	18.5 / 470	10.12 / 267	17 / 432	9.12 / 232	7 / 178
<b>N515-19-20-10.5J</b>	50 / 15	50 / 15	50 / 15	63 / 29	81* / 37	98 / 44	<b>N203</b>	9 / 229	3 / 76	10.5 / 267	20.75 / 527	10.12 / 257	20 / 508	10.62 / 270	7 / 178
<b>N515-23-24-15.5J</b>	75 / 23	65 / 20	75 / 23	75 / 34	92* / 42	110 / 50	<b>N203</b>	9 / 229	3 / 76	15.5 / 394	23.75 / 603	10.12 / 257	24 / 610	12.62 / 321	7 / 178
<b>N516-25-26-15.5B</b>	75 / 23	75 / 23	75 / 23	90 / 34	90 / -	125 / 57	<b>N204</b>	10 / 254	4 / 102	15.5 / 394	25.25 / 641	11.12 / 282	26 / 660	13.62 / 348	8 / 203

**Notes:**

**A hose stop is necessary to keep spring from unwinding.**


1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. **Finish:** Refer to page 3.

**5. Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

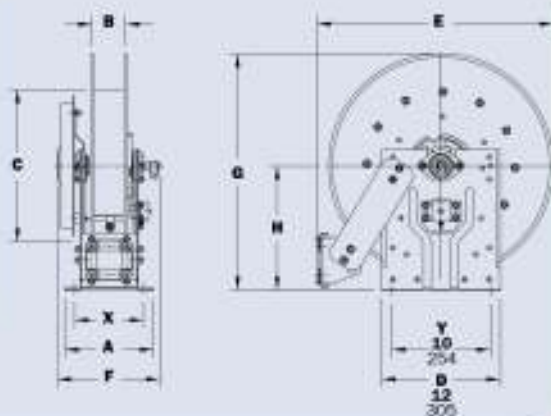

**Available Roller Positions**



SR (STD)



VR (OPT)



TR (OPT)



TR (Wallmount)